


# M7032-101

## 28VDC to 115VAC/400Hz, 750W Inverter

The M7032-101 is a mechanically robust, self-cooled (internal fan), low-weight, high performance DC to AC Inverter, designed for rotary-wing aircraft and high reliability airborne applications. The M7032 converts 28VDC (MIL-STD-704F) to a well-regulated and protected, low-distortion 115VAC 400Hz Sine-wave.

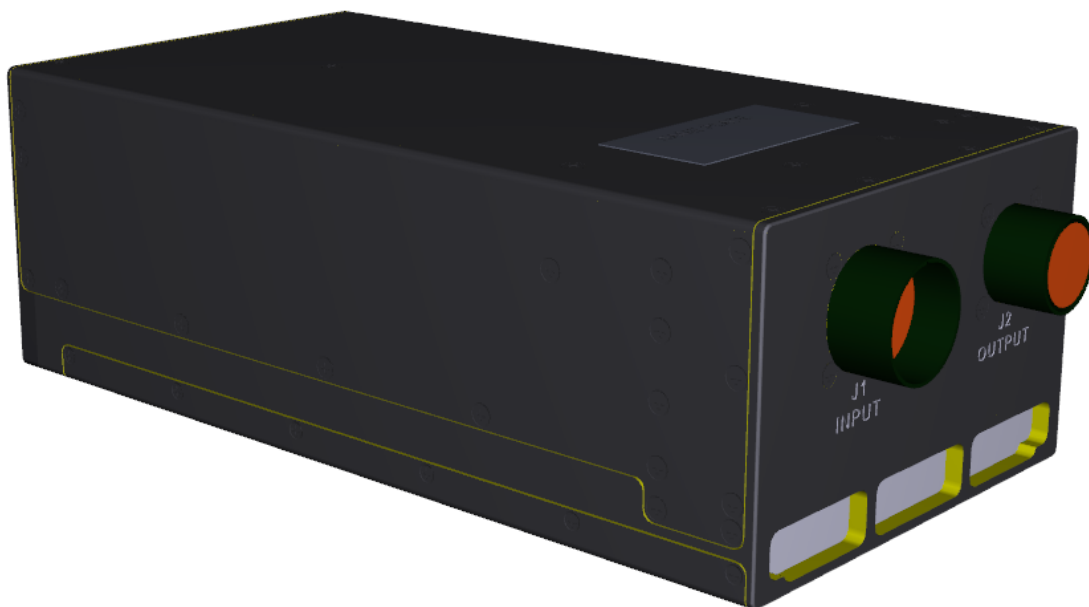

## M7032 DC to AC Inverter

### **Key features:**

- Self-cooled unit. Cooling air confined to a close-channel heatsink.
- Wide operating temperature range (-55°C to +71°C ambient).
- Complies with MIL-STD-704F (28VDC) and MIL-STD-461G.
- Reliably withstands Rotary-wing high-level induced vibration.
- Low weight, 7.3 pounds.
- Clean, low-distortion sine-wave output, even with non-linear load.
- High Efficiency, 88% at full load.
- Enable input, AC-Good and Over temperature output signals.
- Line-contactor's drive output.
- Overtemperature, Overload, Over/Under-voltage and Over/Under-frequency protections.
- Full galvanic isolation between Input, Chassis and Output.
- MIL-DTL-38999 Connectors.
- J-STD-001B and IPC-610A Class-3 workmanship.
- Conformal Coating per MIL-I-46058C and IPC-CC-830.

## M7032 DC to AC Inverter

### Specifications:



<b>DC Input</b>	28VDC per MIL-STD-704F Extended steady-state operating range of 19VDC to 33VDC Full performances during Normal Transient per MIL-STD-704F, Figure 13. No damage during Abnormal Over/Under voltage per MIL-STD-704F, Figure 14.		
<b>AC Output</b>	<b>Voltage</b>	115VAC ±1%	From No-load to Full-load, over the entire DC Input voltage range and all environmental conditions.
	<b>Frequency</b>	400 ±1 Hz	
	<b>Rating</b>	750W/1000VA continuous, 1KW (Overload) for 5 seconds.	
	<b>Short Circuit Current</b>	11.5±1 Amp RMS for 6±1 seconds	
	<b>Peak Current Capability</b>	15Amp (Crest Factor of 2.3 at 750VA).	
	<b>Distortions</b>	<0.5% with linear load. <3% with non-linear load (see Fig 1)	
	<b>Overload Protection</b>	When overloaded (>1KW) or shorted, will continue to operate for 6±1 seconds and then shutdown. Toggling the Enable input, or recycling the DC input will reset the output.	
	<b>Voltage/Frequency Protections</b>	AC Output is protected from Over-voltage, Under-voltage, Over-frequency and Under-frequency.	
	<b>Fault Clearing</b>	Toggling the Enable input, or recycling the DC input will reset (clear) all faults.	
	<b>Over-temperature Protection</b>	Automatic shutdown with auto-recovery .	
<b>Efficiency</b>	>85% at full load (750W) and any DC Input voltage between 19 to at 33VDC		
<b>Isolation</b>	AC Output is isolated (>20MΩ/500VDC) from DC Input, Chassis GND and all other signals. DC Input is isolated (>20MΩ/100VDC) from Chassis GND. The AC-Good and Overtemp Signals are Isolated (>20MΩ/100VDC) from Chassis GND and all other signals. The Enable Input and Line-contactor Drive refer to the 28V RTN Input.		
<b>EMI MIL-STD-461G</b>	CE102, CS101 CS114 (Curve #5, 10 kHz to 200 MHz), CS115, CS116, CS117 (All Equipment Installation, Internal), CS118, RE102, RS101 and RS103 (2MHz-18GHz, 200 V/m, 18GHz-40GHz, 60 V/m).		

## M7032 DC to AC Inverter


### Specifications (Cont.):

<b>Control &amp; Indications</b>	<b>Enable Input</b>	Short (V<5V @ 1mA) to the 28VDC RTN enables the AC Output. Open (I<0.05mA) disables the AC Output. Internally limited to 15VDC.
	<b>AC- Good Output</b>	Opto-isolated (open-collector) BIT signal. Active low (V<0.8V @ 1mA) indicates that the AC output voltage and frequency are within limits. Open (I<0.05mA @ 5V) indicates a fault.
	<b>Over-temp. Output</b>	Opto-isolated (open-collector) signal. Normally Open (I<0.05mA @ 5V). Active low (V<0.8V @ 1mA) indicates an Over-temp condition.
	<b>Line-contactor Drive Output</b>	A 28VDC/0.5Amp drive for an external (optional) Line-contactor. Activated only when the AC output voltage and frequency are stable and within range. In case of an AC Overload, remains active (to allow fault clearing).
<b>Environment</b>	<b>Ambient Temperature</b>	<b>Not Operating:</b> -57°C to +85°C <b>Operating</b> (Full performances): -55°C to +71°C.
	<b>Altitude</b>	<b>Not Operating:</b> Up to 40,000 ft (transportation) <b>Operating</b> (Full performances): Up to 20,000 ft.
	<b>Humidity</b>	MIL-STD-810H, Method 507.6, Proc. II (Aggravated)
	<b>Explosive Atmosphere</b>	MIL-STD-810H, Method 511.7 Proc. I
	<b>Salt Fog</b>	MIL-STD-810H, Method 509.7
	<b>Sand and Dust</b>	MIL-STD-810H, Method 510.7, Proc. I (Blowing Dust)
	<b>Mechanical Shock</b>	MIL-STD-810H, Method 516.8, SRS per Figure 516.8, Proc I (Functional) and Proc V (Crash Hazard), Flight Equipment.
	<b>Vibration</b>	MIL-STD-810H, Method 514.8, Proc I, Cat 14 (Rotary wing aircraft) Sine-on-Random, General.
	<b>Acceleration</b>	MIL-STD-810H, Method 513.8, Proc II (Operational), 6G all directions.
	<b>Contamination by Fluids</b>	MIL-STD-810H, Method 504.3 (Exposure a. Occasional Contamination). 1) Lubricating oils synthetic, aircraft turbine engines, transmissions NATO O-156 2) Aircraft cleaners, Ground equipment, Aircraft interior/exterior MIL-PRF-87937 3) De-icer, Ethylene or Propylene Glycol mixtures. 4) Aviation turbine fuels, Kerosene, JP-8 (NATO 504.3).
	<b>Fungus</b>	Does not support fungus growth, in accordance with the guidelines of MIL-STD-454, Requirement 4.
<b>Reliability</b>	MTBF >20,000 at +71°C and A <sub>RW</sub> Environment (MIL-HDBK-217F)	
<b>Weight</b>	Less than 7.5 Lbs.	

## M7032 DC to AC Inverter

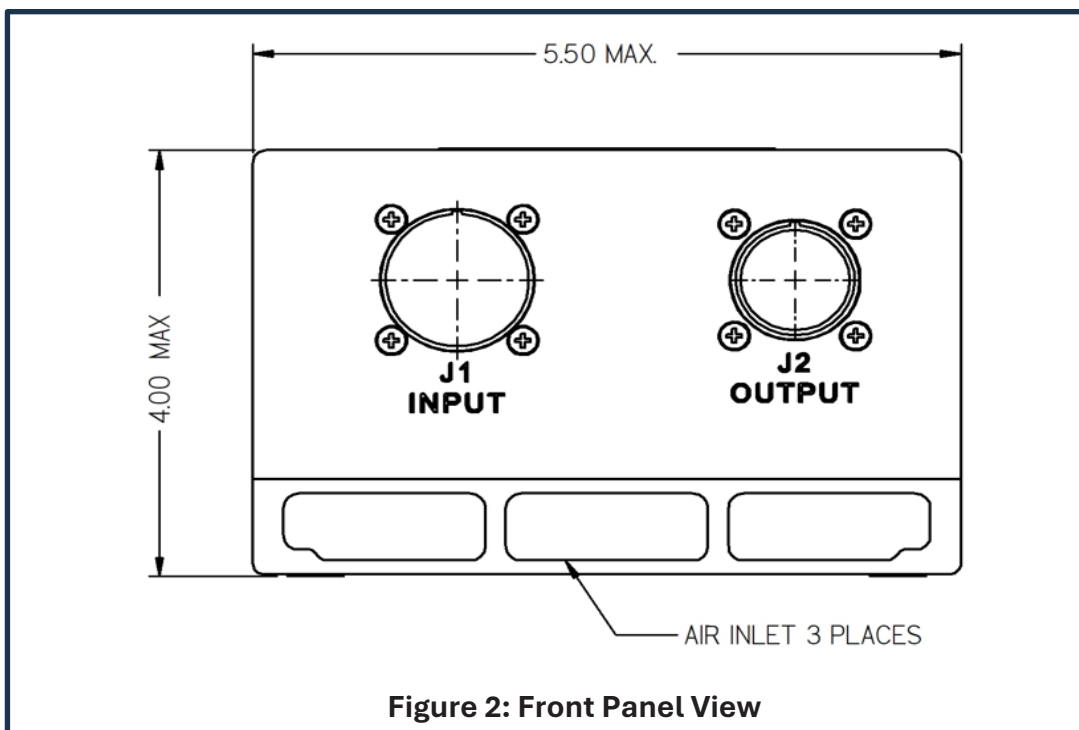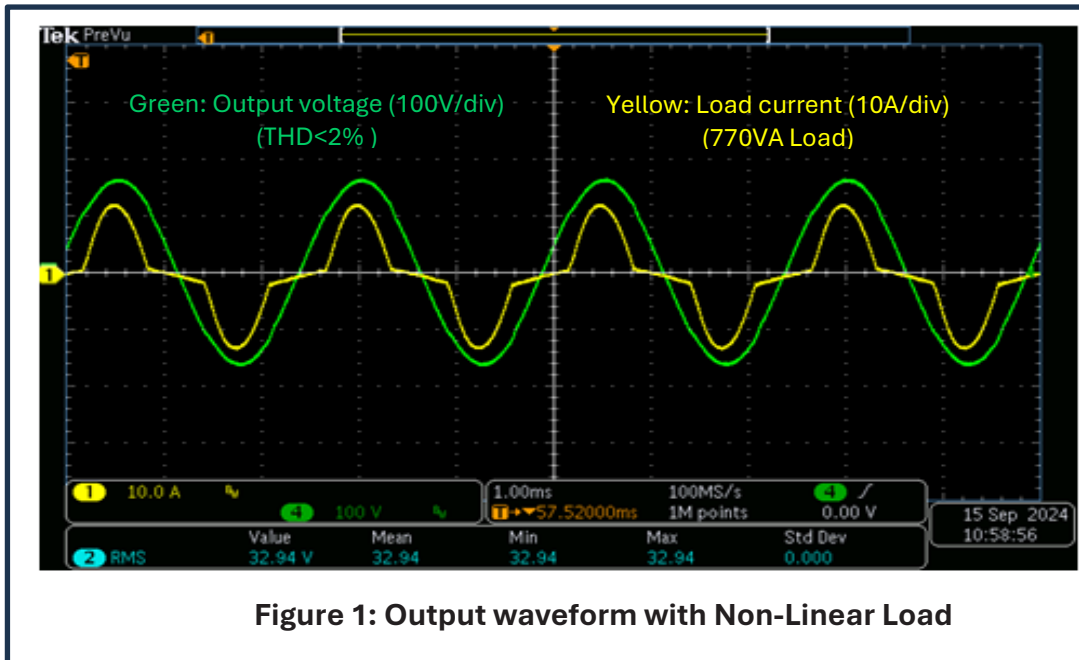

## M7032 DC to AC Inverter

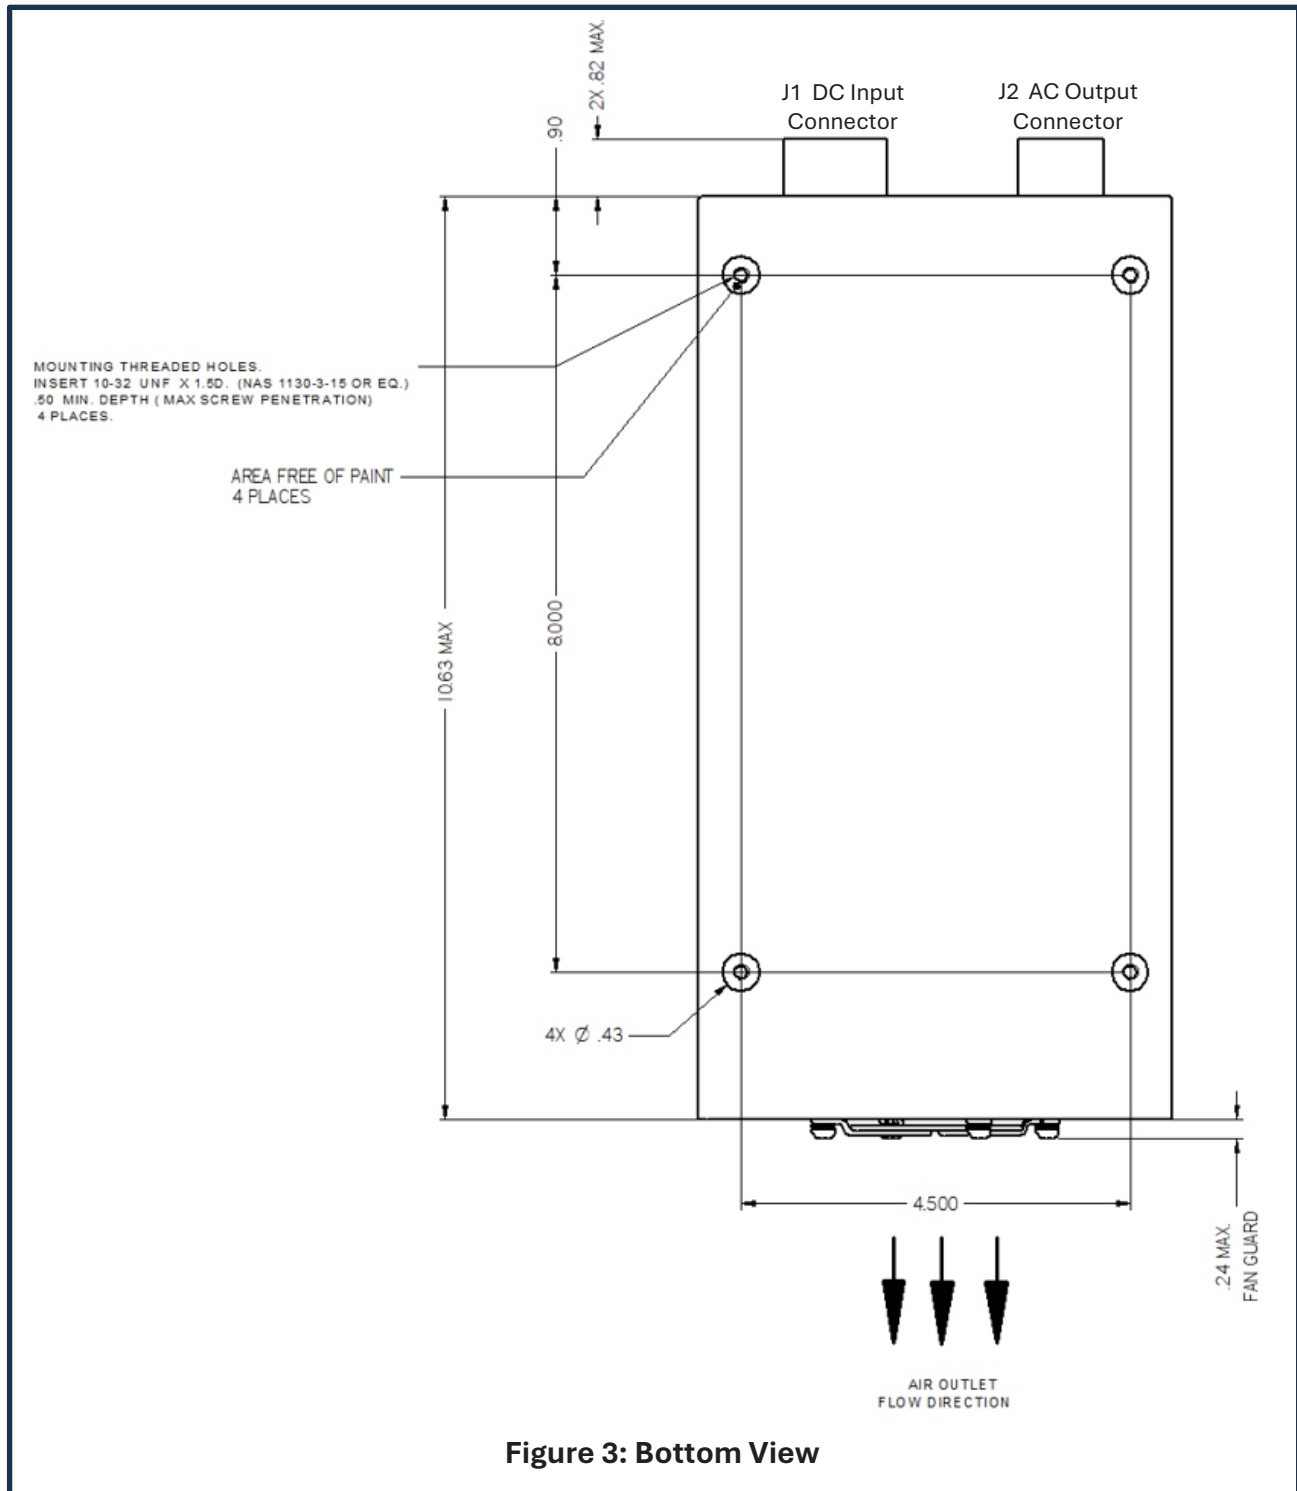

## M7032 DC to AC Inverter

### I/O Connectors and Pin-out

J1 DC Input D38999/20WE6PN			
#	Name	I/O	AWG
<b>A</b>	28V RTN	I	#12
<b>B</b>	28V RTN	I	#12
<b>C</b>	N.C.	N/A	#12
<b>D</b>	28VDC	I	#12
<b>E</b>	28VDC	I	#12
<b>F</b>	N.C	N/A	#12

J2 AC Output D38999/20WD18SN				
#	Name	I/O	AWG	Notes
<b>A</b>	<b>115VAC Phase</b>	O	#20	
<b>B</b>	Reserved	N/A	#20	
<b>C</b>	Reserved	N/A	#20	
<b>D</b>	<b>115VAC Neut</b>	O	#20	
<b>E</b>	Reserved	N/A	#20	
<b>F</b>	Chassis GND	O/I	#20	
<b>G</b>	Enable RTN	I	#20	Internally connected to 28V RTN
<b>H</b>	Over-temp	O	#20	
<b>J</b>	SIG RTN	O	#20	Return signal for Over-temp and AC-Good
<b>K</b>	AC-Good	O	#20	
<b>L</b>	<b>115VAC Phase</b>	O	#20	
<b>M</b>	Line-contactor Drive	O	#20	28VDC drive to the high-side of the relay's coil. Connect the low-side to 28V RTN.
<b>N</b>	Reserved	N/A	#20	
<b>P</b>	Reserved	N/A	#20	
<b>R</b>	<b>115VAC Neut</b>	O	#20	
<b>S</b>	Enable	I	#20	
<b>T</b>	Reserved	N/A	#20	
<b>U</b>	Reserved	N/A	#20	