

M185 SERIES

AC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- **MINIATURE**
- **HIGH DENSITY**
- **AC/DC CONVERTER**
- **QUAD OUTPUT**
- **UP TO 150W**

M185 SERIES AC/DC POWER SUPPLY

Applications

Military, Ruggedized, Telecom, Industrial

Special Features

- Four (4) DC outputs
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed internal switching frequency (250 kHz)
- External synchronization ability
- EMI filters included
- Input undervoltage lockout (< 75 VAC)

Environmental Conditions

Meets or exceeds MIL-STD-810D

Temperature:

Operating -40°C to +90°C (baseplate)

Storage -55°C to +125°C

Reliability

150,000 hours, calculated per MIL-STD-217F Notice 2 at +85°C baseplate, ground fixed.

Protections

Current limiting (indefinite):

Outputs 1 through 3: Foldback

Output 4: Hiccup

Over Voltage Protection:

Outputs 1 through 3: Passive transorb.

Output 4: Crowbar.

Over Temperature Protection:

Shutdown at baseplate temperature above +105°C $\pm 5^\circ\text{C}$. Automatic recovery at baseplate temperature below +95°C $\pm 5^\circ\text{C}$

Electrical Specifications

AC INPUT

Input range:

90-265V_{AC}, 400Hz, Single-Phase (85-265V_{AC}, 50/60/400Hz

Single-Phase option available)

Power Factor: 0.98

Efficiency: up to 75%

EMC:

Meet MIL-STD-461F*: CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103

Isolation:

Input to Outputs: 500 V_{DC}

Input to Case: 500 V_{DC}

DC OUTPUT (floating from each other)

Outputs range:

Output	Voltage	Current	Power
1	3.3 to 24V _{DC}	0 to 5A	0 to 30W
2	3.3 to 24V _{DC}	0 to 5A	0 to 30W
3	3.3 to 24V _{DC}	0 to 10A	0 to 60W
4	1.8 to 15V _{DC}	0 to 30A	0 to 100W

Line/Load regulation:

Up to $\pm 1\%$ (no load to full load, -40°C to +85°C)

Ripple and Noise: 50mV_{p-p}, typical (max. 1%)

Isolation:

Outputs to Case: 100V_{DC}

- Compliance achieved with shielded harness and static resistive load.

M185 SERIES AC/DC POWER SUPPLY

Pin Assignment

Input Connector (P1):

Connector type: M24308/24-37F or eq.

Mates with: M24308/4-1F or M24308/23-7 or eq.

Pin No.	Function	Pin No.	Function
1	CHASSIS	6	N.C.
2	N.C.	7	NEUTRAL
3	NEUTRAL	8	N.C.
4	N.C.	9	PHASE
5	PHASE		

Output Connector (J2):

Connector type: M24308/23-46F or eq.

Mates with: M24308/2-4F or eq.

Pin No.	Function	Pin No.	Function	Pin No.	Function
1	INHIBIT	14	OUT #4 (+)	27	SENSE RTN OUT #4
2	SYNC	15	OUT #4 (+)	28	OUT #4 RTN (-)
3	OUT #3 RTN (-)	16	OUT #4 (+)	29	OUT #4 RTN (-)
4	OUT #3 (+)	17	OUT #4 (+)	30	OUT #4 RTN (-)
5	OUT #3 (+)	18	OUT #4 (+)	31	OUT #4 RTN (-)
6	OUT #2 (+)	19	SENSE OUT #4	32	OUT #4 RTN (-)
7	N.C.	20	INHIBIT RTN	33	OUT #4 (+)
8	OUT #1 (+)	21	SYNC RTN	34	OUT #4 (+)
9	OUT #4 RTN (-)	22	OUT #3 RTN (-)	35	OUT #4 (+)
10	OUT #4 RTN (-)	23	OUT #3 RTN (-)	36	OUT #4 (+)
11	OUT #4 RTN (-)	24	OUT #3 (+)	37	OUT #4 (+)
12	OUT #4 RTN (-)	25	OUT #2 RTN (-)		
13	OUT #4 RTN (-)	26	OUT #1 RTN (-)		

Note: All pins with identical function/designation should be connected together for best performance.

Functions and Signals

INHIBIT signal

The **INHIBIT** signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN will turn on the power supply (For normal operation leave the signal not connected). TTL “0” or SHORT will turn off the power supply.

This signal is referenced to **INHIBIT RTN** pin and is isolated from all other pins.

SYNC signal

The **SYNC** signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be $250 \text{ kHz} \pm 10 \text{ kHz}$.

When not connected the power supply will work at $250 \text{ kHz} \pm 10 \text{ kHz}$.

This signal is referenced to **SYNC RTN** pin and is isolated from all other pins.

SENSE


The **SENSE** is used to achieve accurate load regulation at load terminals of **output #4**. This is done by connecting the pins directly to the load terminals. The remote sense correction function is limited to voltage drop between converter’s output and load terminals of 2% to 5%, or up to 0.5V, the least of the two.

When not used, connect **SENSE** to **OUT #4** and **SENSE RTN** to **OUT #4 RTN**.

Do not leave **SENSE** and **SENSE RTN** pins unconnected. These pins can be tied internally to avoid external connection, if function is not required – *consult factory*.

M185 SERIES AC/DC POWER SUPPLY

Outline Drawing

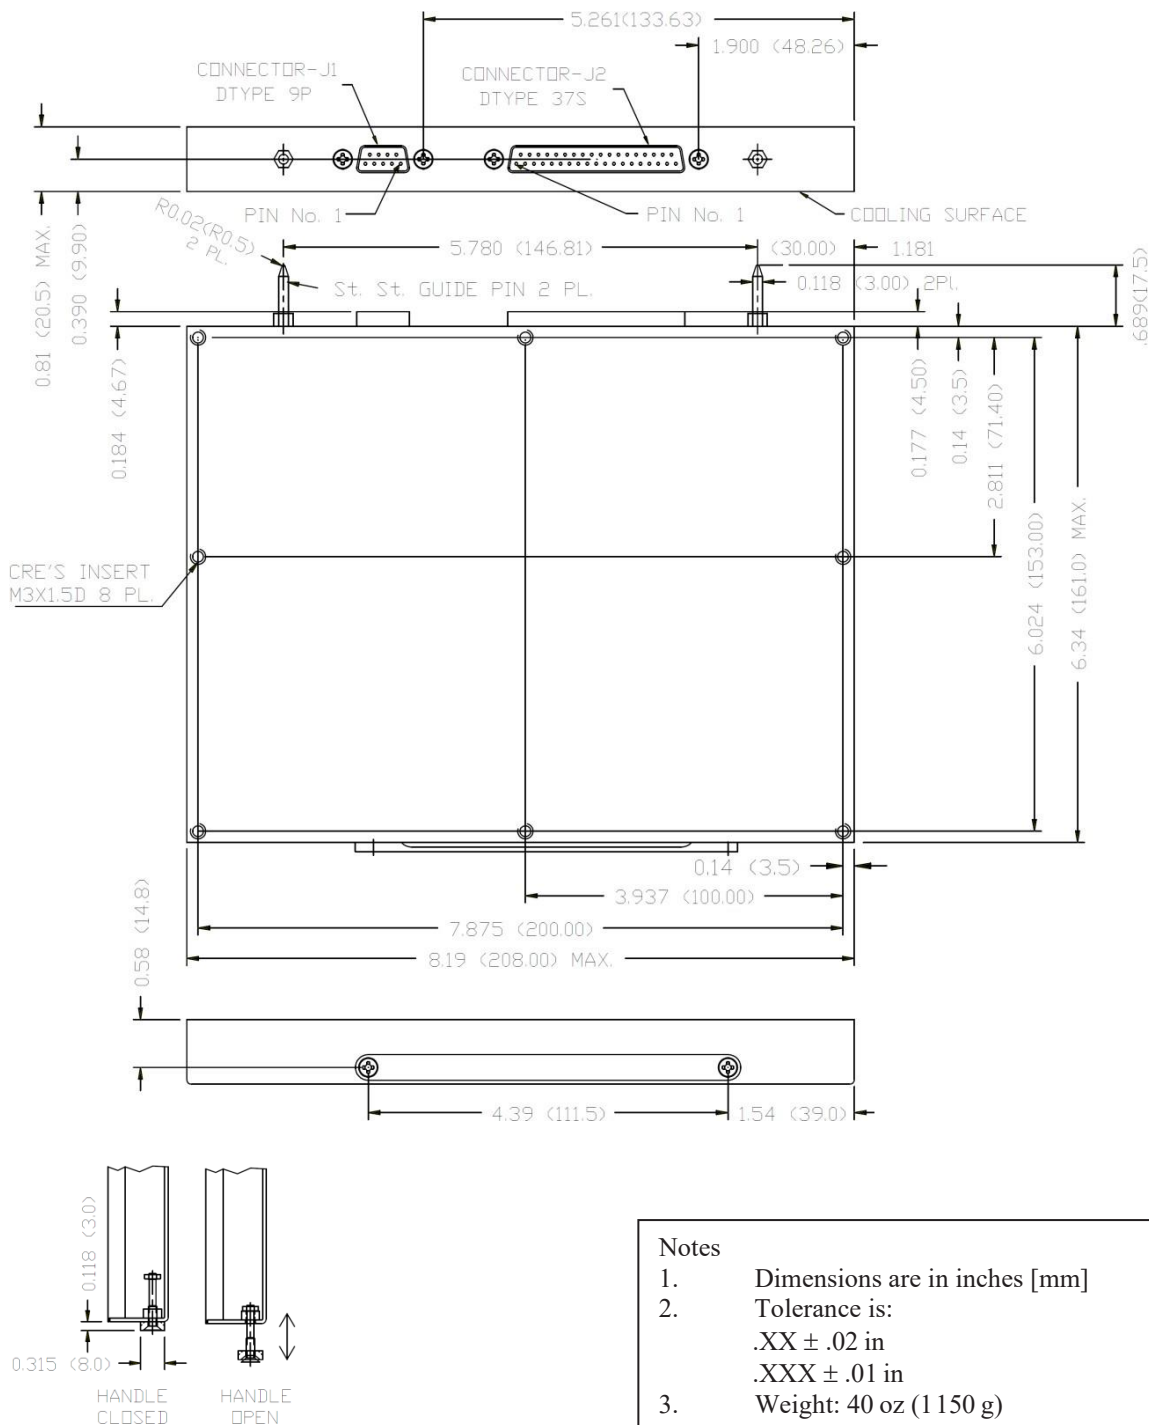

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:
.XX ± .02 in
.XXX ± .01 in
3. Weight: 40 oz (1 150 g)

Note: Specifications are subject to change without prior notice by the manufacturer.