

## M2803 SERIES

*AC/DC POWER SUPPLY*



### PRODUCT HIGHLIGHTS

- AC/DC CONVERTER
- INPUT 230VAC 60Hz
- OUT RANGE 100 to 320 VDC
- UP TO 2500W

## M2803 SERIES AC/DC 3-PHASE POWER SUPPLY

### Applications

Military, Ruggedized, Telecom, Industrial, Ground Radar

### Special Features

- Compact size
- High efficiency
- Wide input range
- Input / Output isolation
- Fixed switching frequency (approx. 400 kHz)
- Remote Inhibit (On/Off)
- EMI filters included
- Limited Inrush Current
- Indefinite short circuit protection with auto-recovery
- Over temperature shutdown with auto-recovery

### Environmental Conditions

Meets or exceeds MIL-STD-810G

#### Temperature:

Operating -55 °C to +85 °C (at baseplate)

Storage -55 °C to +125 °C

### Reliability

150 000 hours, calculated IAW MIL-HDBK-217F

Notice 2 at +85 °C baseplate, Ground Fix environment.

### Electrical Specifications

#### AC INPUT

##### Input Voltage Range:

3-phase 230 V<sub>RMS,L-N</sub> ± 20% / 50 Hz

##### Over-voltage lockout: Above 300 V<sub>RMS,L-N</sub>

Efficiency: 86%, typical (270V variant, nominal input line, maximum load)

Power Factor: Minimum 0.8 from 50% load

EMC: Designed to meet\* MIL-STD-461F: CS101, CS114, CS115, CS116, RE102, RS103 with external filter and shielded cable.

##### Isolation:

1 000 V<sub>DC</sub> between Input and Output

1 000 V<sub>DC</sub> between Input and Case

#### DC OUTPUT (floating from input)

Voltage Range: 100 to 320 V<sub>DC</sub>

Current Range: 0 to 20 A

Power Range: 0 to 2 500 W

##### Line/Load Regulation:

Less than ±1% (0 to 100% load, -55 °C to +85 °C and over input voltage range)

Ripple and Noise: 500 mV<sub>p-p</sub>, typical (Up to 1%)

##### Overload / Short-Circuit Protection:

Current limit at moderated overload, hiccup at high overload to short circuit.

##### Over-Voltage Protection:

Passive transorb on output.

##### Over Temperature Protection:

Shutdown if baseplate temperature exceeds +105 °C ± 5 °C; Automatic recovery on cool-down to below +95 °C ± 5 °C

##### Isolation:

500 V<sub>DC</sub> between Output and Case.

† When using shielded cables and static resistive load.

## M2803 SERIES AC/DC 3-PHASE POWER SUPPLY


### Pin Assignment

#### CONNECTOR J1 (INPUT)

Connector type: D38999/20WD5PN or eq.

Mating connector: D38999/26WD5SN or eq.

Function	Pin No.	
PHASE A	A	●
PHASE B	B	●
PHASE C	C	●
SPARE	D	
CHASSIS	E	●




#### CONNECTOR J2 (OUTPUT)

Connector type: D38999/20WD19SN or eq.

Mating connector: D38999/26WD19PN or eq.

Function	Pin No.	Polarity	
V <sub>OUT</sub>	A, B, C, P, R	+	●
V <sub>OUT</sub> RTN	J, K, L, T, U	-	●
INHIBIT	G	+	●
INHIBIT RTN	F	-	⊙
PWR GOOD	D	+	●
PWR GOOD RTN	E	-	⊙
SPARE	H, M, N, S, V		



## M2803 SERIES AC/DC 3-PHASE POWER SUPPLY

### Functions and Signals

#### **INHIBIT signal (connector J2, pin G)**

The **INHIBIT** signal is used to turn the power supply ON and OFF.

To turn the power supply ON, leave pin G open.

To turn the power supply OFF, short pin G to pin F.

If not used, leave pin G unconnected.

This signal is referenced to **INHIBIT RTN (connector J2, pin F)**

#### **PWR GOOD signal (connector J2, pin D)**

The **PWR GOOD** signal indicates the status of the output voltage.

When output voltage rises above  $95\% \pm 5\%$  of its nominal value, pin 10 will be pulled down to pin 13 through a  $49.9 \Omega \pm 1\%$  resistor and a phototransistor.


When output voltage falls below  $90\% \pm 5\%$  of its nominal value, pin 10 will be in high impedance mode.

If not used, leave the signal unconnected.

This signal is referenced to **PWR GOOD RTN (connector J2, pin E)**

Both pins 10 and 13 are isolated from all other parts of the circuitry.

### Typical Connection Diagram

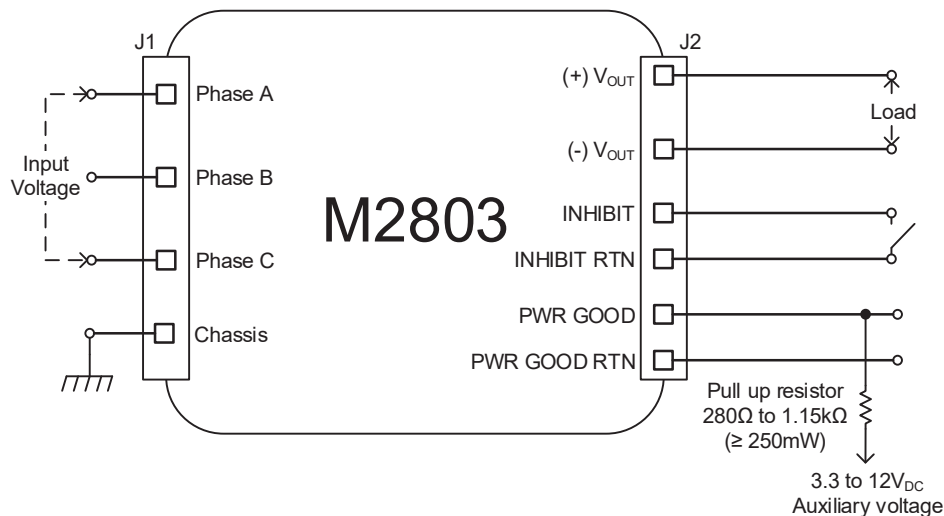

**Note:** PWR GOOD pull-up resistor and auxiliary voltage shown in this diagram are typical values. The system designer must select the actual values such that no damage can occur to the internal components of the power supply – *consult factory for more information.*



### Standard Configurations

Part number	Input		Output		Notes
	Voltage range	Frequency	Voltage	Current	
M2803103	3-phase, 207 to 253 V <sub>AC</sub>	50/60 Hz	270 V <sub>DC</sub>	9.5 A	
M2803104	3-phase, 207 to 253 V <sub>AC</sub>	50/60 Hz	270 V <sub>DC</sub>	9.5 A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$
M2803803	3-phase, 207 to 253 V <sub>AC</sub>	50/60 Hz	270 V <sub>DC</sub>	9.5 A	
M2803804	3-phase, 207 to 253 V <sub>AC</sub>	50/60 Hz	270 V <sub>DC</sub>	9.5 A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$

### Special Features For M2803-8XX:

- This variant is REACH Compliant
- The aluminum parts comprising this variant are chromate conversion coated per MIL-DTL-5541F, Type II CLASS 1A or eq

Additional configuration available. **Consult factory for details**

*Note: Specifications are subject to change without prior notice by the manufacturer.*