
M7419 SERIES

DC/DC POWER SUPPLY

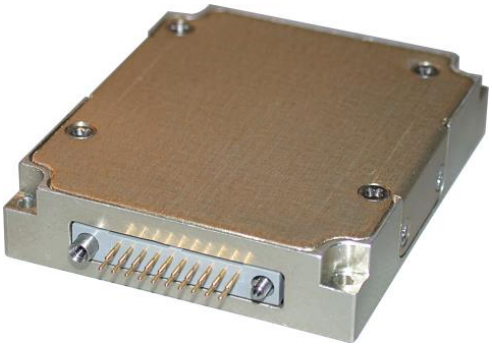

PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- SINGLE OUTPUT
- DC/DC CONVERTER
- UP TO 50W

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Amphenol
MILITARY HIGH SPEED

M7419 Series– DC/DC Power Supply

Applications

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial

Special Features

- Miniature size
- High efficiency
- Wide input range
- Input / Output isolation
- Remote sense compensation
- Remote Inhibit (On/Off)
- Fixed switching freq. (250 kHz)
- External sync. capability
- EMI filters included
- Conduction cooled
- Non-latching protections:
  - Overload/short-circuit
  - Over-voltage
  - Over temperature

Electrical Specifications

DC Input

Normal range: 18 to 48 V_{DC}

Not damaged (may restart) when exposed to surges IAW MIL-STD-1275A (100 V / 50 ms) and IAW MIL-STD-704A (80 V / 0.1 s)

DC Output

Voltage range: 1.8 to 50 V_{DC}
Current: 0 to 10 A
Power: 0 to 50 W

Isolation

Input to Output: 200 V_{DC}
Input to Case: 200 V_{DC}
Output to Case: 100 V_{DC}

Output Voltage Regulation

Better than or equal to ±1% (low to high line voltage, no load to full load, –55 °C to +85 °C at baseplate).

Efficiency

Typically 70% to 80%, depending on output voltage.

Up to 83% @ 28 V_{DC} output, 28 V_{DC} input, full load and room temperature.

EMC

Complies with MIL-STD-1686 Indirect 4 kV ESD.

Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103

Ripple and Noise

Less than 50 mV_{p-p}, typical (max. 1%) without external capacitance. When connected to system capacitance ripple drops significantly.

Load Transient Overshoot and undershoot

Output resistance at load change of 50%-100% is 30-70 mΩ (depending on output voltage). Output back to steady stated within 300-500 µs

Turn on Transient

No voltage overshoot during power on.

* Compliance achieved with 5µH LISN, shielded harness and static resistive load.

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Protections †

Input

- **Under-Voltage Lockout**
  Unit may shut down if input voltage drops below 16.5 ± 1 V.
- **Over-Voltage Lockout**
  Unit may shut down if input voltage rises above 52 ± 2 V.

Output

- **Over-Voltage Protection**
  Passive transorb, chosen at 120% ± 10% of nominal voltage.
- **Current Limiting**
  Continuous protection (10-30% above maximum current) for unlimited time (Hiccup).

General

- **Over temperature protection:**
  Shutdown if base plate temperature rises above +105 °C ± 5 °C.
  Auto recovery when baseplate cools down to +95 °C ± 5 °C.

Environmental Conditions

Designed to meet MIL-STD-810F

Temperature
Methods 501.4 & 502.4
Operating: –55 °C to +85 °C (at baseplate)
Storage: –55 °C to +125 °C (ambient)

Vibration
Method 514.5
Procedure I
14.76 g_{rms} 20-2000 Hz for 500 seconds
at each of 3 perpendicular axes.

Altitude
Method 500.4
Procedures I – Storage/Air transport:
up to 70,000 ft. (non-operational)
Procedure II – Operation/Air Carriage:
up to 70,000 ft. (operational)

Shock
Method 516.5
Procedure I
50 g / 11 ms terminal peak half-sine shock pulse

Humidity
Method 507.4
Up to 95% RH

Salt Fog
Method 509.4

Reliability


150,000 hours, calculated IAW MIL-HDBK-217F Notice 2 at +85°C baseplate, Ground fixed conditions.

† Thresholds and protections can be modified / removed – please consult factory.


John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Efficiency vs. Load

- **5 V_{DC} output:**

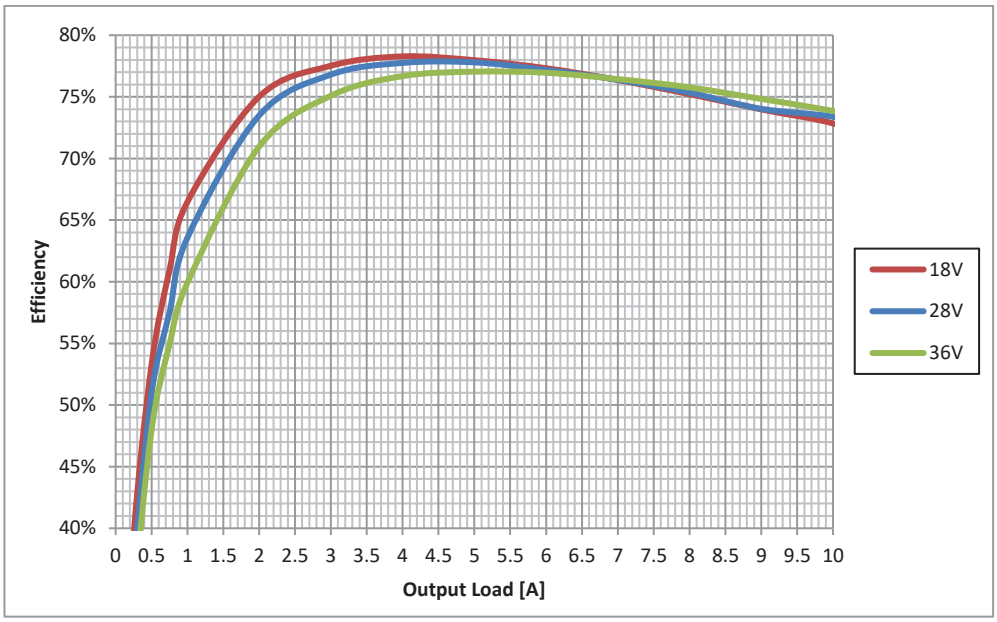

- **28 V_{DC} output:**

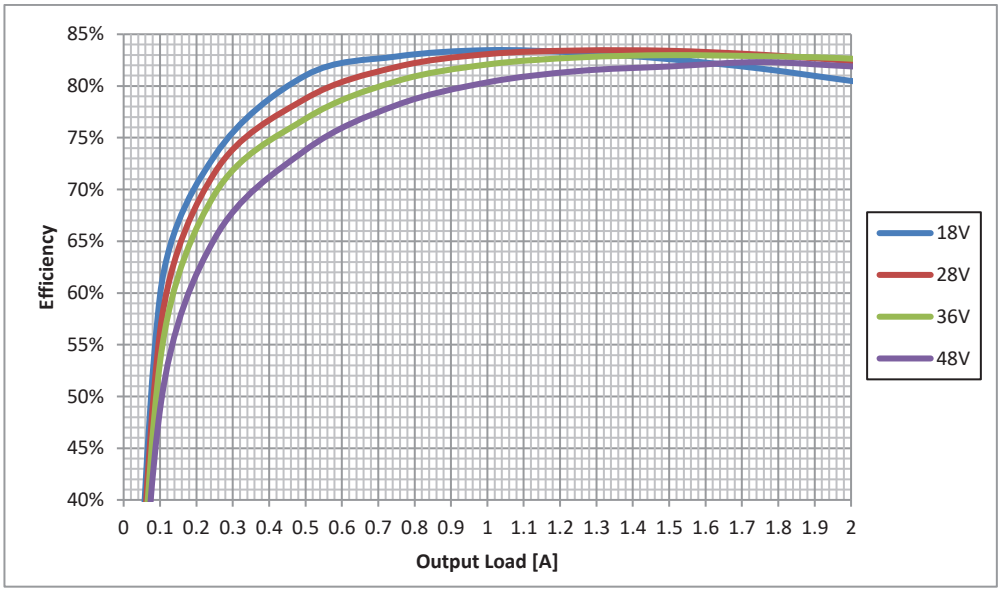

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com


Pin Assignment

Connector type: RM272-020-322-2900 or eq.

Mates with: RM242-020-571-5900 (crimp removable contacts) or RM242-020-241-5900 (solder cup contacts) or eq.

Pin #	Function	Polarity	
1	INPUT	+	
2	INPUT	+	
3	INPUT RTN	–	
4	INHIBIT	+	
5	SYNC	+	
6	SENSE RTN	–	
7	OUTPUT RTN	–	
8	OUTPUT RTN	–	
9	OUTPUT	+	
10	OUTPUT	+	

Pin #	Function	Polarity	
11	INPUT	+	
12	INPUT RTN	–	
13	INPUT RTN	–	
14	N.C.		
15	N.C.		
16	SENSE	+	
17	OUTPUT RTN	–	
18	OUTPUT RTN	–	
19	OUTPUT	+	
20	OUTPUT	+	



Note: All output pins with the same function should be connected together for best performance.

Functions and Signals

INHIBIT signal

The INHIBIT signal is used to turn the power supply ON and OFF.
TTL "1"or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)
TTL "0" – will turn off the power supply.
Grounding for signal is VIN RTN pin.


SYNC signal

The SYNC signal is used to allow the power supply frequency to sync with the system frequency.
SYNC frequency can be 250 ± 10 kHz, TTL level.
When left open, the power supply will work at 250 ± 10 kHz (internal clock).
This signal is referenced to VIN RTN pin.

SENSE


The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load's terminals).
The use of remote sense has a limit of voltage dropout between converter's output and load terminals of 2-10% of voltage output.
When not used connect SENSE to VOUT and SENSE RTN to VOUT RTN.

Typical Connection Diagram

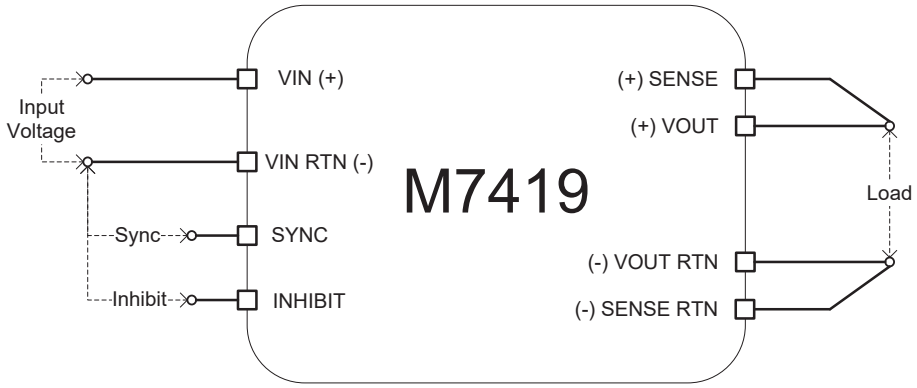


John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Outline Drawing

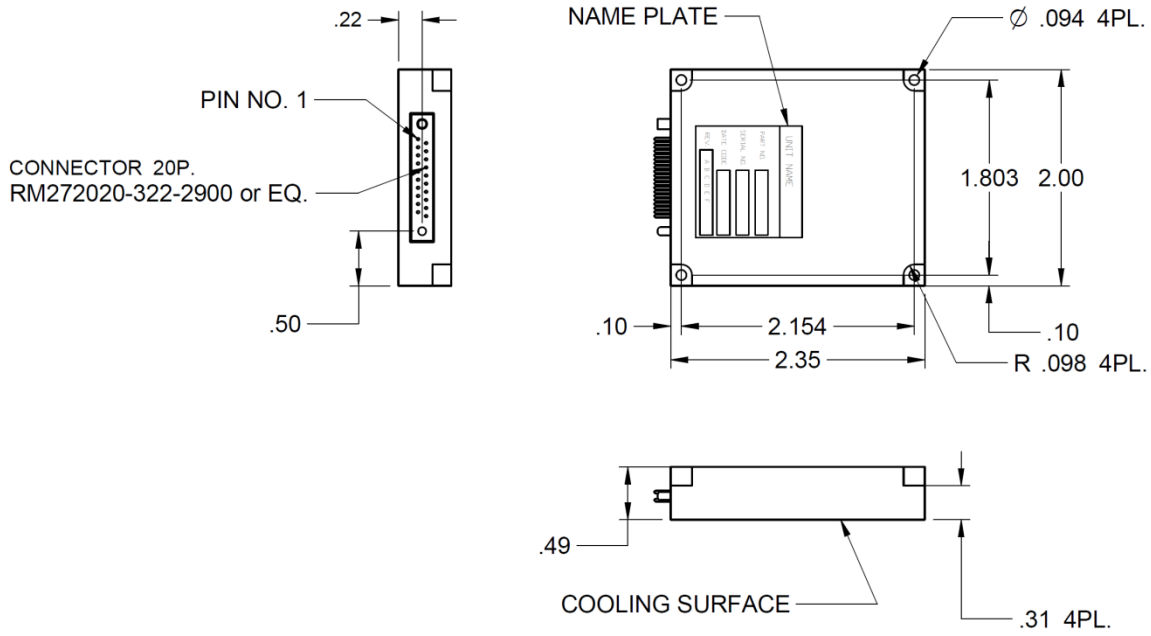

Heat Dissipation Surface

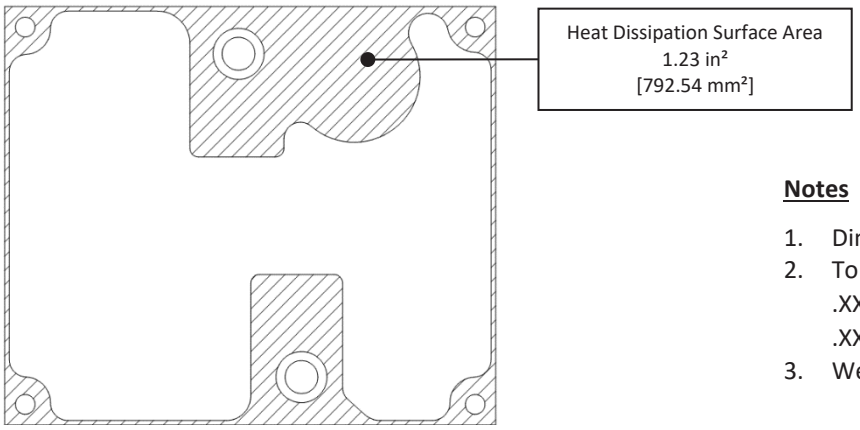

Notes

1. Dimensions are in inches [mm]
2. Tolerance is:
   .XX ± 0.01 in
   .XXX ± 0.005 in
3. Weight: Approx. 2.5 oz [70 g]

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com

Standard Variants

Part number	Input configuration	Output configuration
M7419100	18-48 VDC	5 VDC / 8 A
M7419101	18-48 VDC	12 VDC / 3 A
M7419102	18-48 VDC	15 VDC / 2.5 A
M7419103	18-48 VDC	24 VDC / 2 A
M7419104	18-48 VDC	28 VDC / 1.8 A
M7419105	18-48 VDC	48 VDC / 0.8 A
M7419106	18-50 VDC	24 VDC / 2 A
M7419-800*	18-48 VDC	5 VDC / 8 A
M7419-801*	18-48 VDC	12 VDC / 3 A
M7419-802*	18-48 VDC	15 VDC / 2.5 A
M7419-803*	18-48 VDC	24 VDC / 2 A
M7419-804*	18-48 VDC	28 VDC / 1.8 A
M7419-805*	18-48 VDC	48 VDC / 0.8 A

*This Product is REACH Compliant.
*The aluminum parts comprising this converter are chromate conversion coated per MIL-DTL-5541F, Type II CLASS 1A or eq.

Note: Specifications are subject to change without prior notice by the manufacturer.

John Tucci • Phone: (607) 563-5388 • Email: jtucci@amphenol-aao.com
• www.amphenol-aerospace.com