


MULTI-CHANNEL FIBER OPTIC CIRCULAR

MIL-DTL-38999 CONNECTOR WITH MT FERRULES – MTC-HD

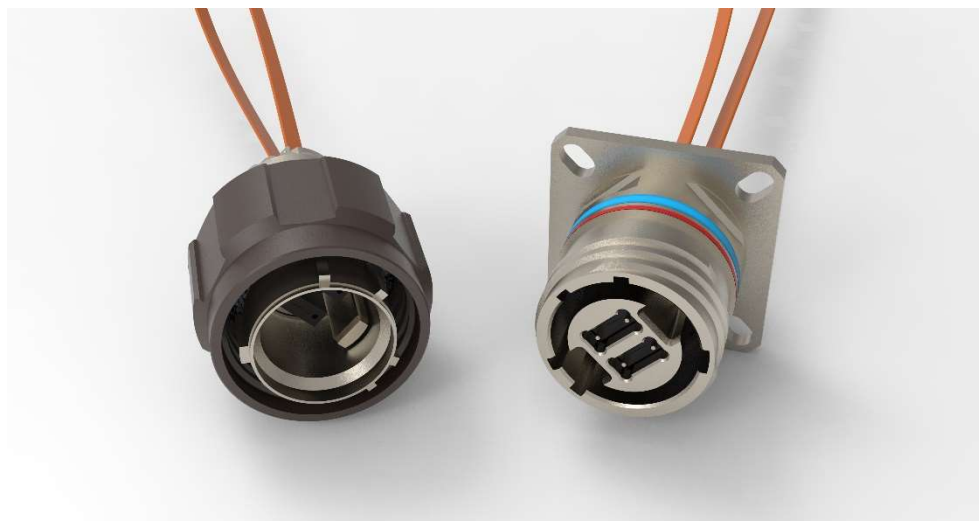

The next generation of circular connectors with high density MT ferrules are here: introducing the **MTC-HD**. Increasing the density for rugged environments including military aerospace, commercial aircraft, ground-based radar, or industrial applications. The first generation of MT38999 supported two shell sizes and up to 24F ferrules, whereas **MTC-HD** offers an additional six insert arrangements and up to 48F ferrules!

FEATURES

- Brand new and simpler MT retention mechanism
- Off the shelf MT ferrules, guide pins, and springs
- Additional shell sizes and cavity counts
- Rear insertion with rear release mechanism
- Accessory threads to accommodate Amphenol's full line of backshells or conduit adapters
- No ganged retention mechanism means that each contact is individually serviceable
- Low insertion loss for single mode or multimode fiber
- Option for sealed and hermetic connectors
- Physical contact or expanded beam ferrules
- Option for metal insert for improved EMI protection
- Amphenol is expanding the reputation for being the gold standard for MIL-DTL-38999 connectors

TEST SPECIFICATIONS

DESCRIPTION	REQUIREMENT
Optical Insertion Loss (MM)	≤0.45 dB on 50/125μm fiber
Optical Insertion Loss (SM)	≤0.50 dB on 9/125μm fiber
Optical Return Loss (MM)	≥25 dB on 50/125μm fiber
Optical Return Loss (SM)	≥60 dB on 9/125μm fiber
Thermal Cycle	Per TIA-455-3
Temperature Life	Per TIA-455-4
Humidity	Per TIA-455-5
Vibration	Per TIA-455-11
Mechanical Shock	Per TIA-455-14
Mating Durability	Per TIA-455-21
Sealing	Per TIA-455-23

Welcome to the Boneyard! Check out Amphenol's latest next generation D38999 with MT cavities. We created a barebones retention mechanism to avoid working your fingers down to the bone!



HOW TO ORDER MTC-HD:

Ordering procedure is shown below using part number CF-5E4013-02P

1.	2.	3.	4.	5.	6.	7.
Connector Type	Connector Class	Terminus Style	Shell Finish	Shell Style	Shell Size – Insert Arrangement	Insert Type & Key/ Keyway Position
CF-	5	E	4	0	13-02	P

1. Connector Type

	Designates
CF	Multi-Channel Fiber Optic Connector MTC-HD

2. Connector Class

	Designates
5	Aluminum Shell
6	Composite Shell
8	Stainless Steel Shell

3. Termini Style

	Designates
E	MTC-HD

4. Shell Finish

	Designates
4	Electroless Nickel
9	Olive Drab Cadmium
D	Durmalon™ (Nickel-PTFE)
Z	Black Zinc Nickel

5. Shell Style

	Designates
0	Wall Mount Receptacle
6	Straight Plug
7	Jam Nut Receptacle

6. Shell Size & Insert Assembly

	Designates
13-02	Shell Size 13 – Two Cavity
17-03	Shell Size 17 – Three Cavity
19-04	Shell Size 19 – Four Cavity
21-06	Shell Size 21 – Six Cavity
23-08	Shell Size 23 – Eight Cavity
25-10	Shell Size 25 – Ten Cavity

7. Insert Type & Key/ Keyway Position




Alternate Position	Suffix Letter	
	Pins	Sockets
Normal	P	S
A	G	H
B	I	J
C	K	L
D	M	N
E	R	T






INSERT ARRANGEMENTS:

This illustrated listing represents the available patterns incorporating the MTC contact body within D38999, Series III connectors. The contacts are situated in a 45° orientation to the main keyway of the connector.

Front face of pin inserts illustrated



Insert Arrangement	13-02	17-03	19-04
Number of Contacts	2	3	4




Insert Arrangement	21-06	23-08	25-10
Number of Contacts	6	8	10



MT TERMINI ASSEMBLY KIT:

- Brand new MT retention mechanism
- Utilizing off the shelf ferrules, clamp assemblies, and springs
- Simpler, cheaper, and easier to assemble

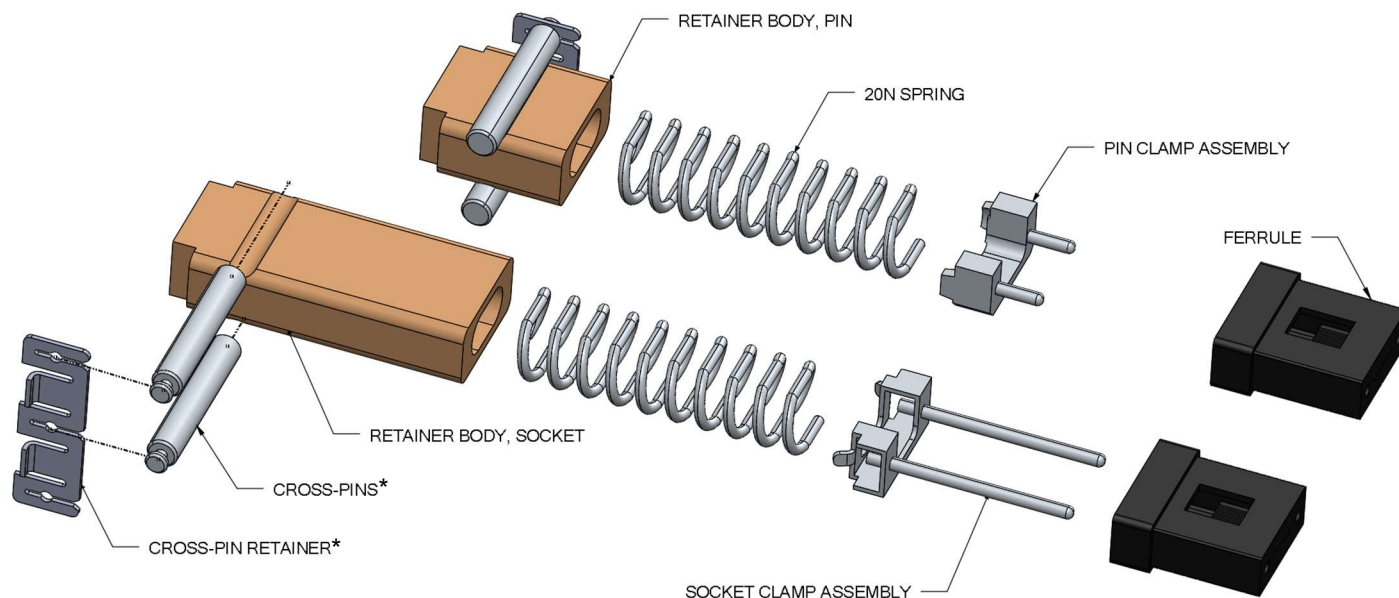


*Cross-pins and cross-pin retainers are supplied with the base connector

HOW TO ORDER MTC-HD TERMINI KITS:

Kit Part Number	Gender	Retainer Body	Spring	Ferrule			
				Count	Arrangement	Mode	Type
CF-198271-000	Socket	✓	✓	None Included			
CF-198271-002	Socket	✓	✓	8	1x8	SM	Elite
CF-198271-003	Socket	✓	✓	12	1x12	SM	Elite
CF-198271-004	Socket	✓	✓	24	2x12	SM	Elite
CF-198271-101	Socket	✓	✓	4	1x4	SM	Standard
CF-198271-102	Socket	✓	✓	8	1x8	SM	Standard
CF-198271-103	Socket	✓	✓	12	1x12	SM	Standard
CF-198271-104	Socket	✓	✓	24	2x12	SM	Standard
CF-198271-202	Socket	✓	✓	12	1x12	MM	Elite
CF-198271-203	Socket	✓	✓	16	1x16	MM	Elite
CF-198271-204	Socket	✓	✓	16	2x8	MM	Elite
CF-198271-205	Socket	✓	✓	24	2x12	MM	Elite
CF-198271-206	Socket	✓	✓	32	2x16	MM	Elite
CF-198271-301	Socket	✓	✓	4	1x4	MM	Standard
CF-198271-302	Socket	✓	✓	8	1x8	MM	Standard
CF-198271-303	Socket	✓	✓	12	1x12	MM	Standard
CF-198271-304	Socket	✓	✓	16	1x16	MM	Standard
CF-198271-305	Socket	✓	✓	24	2x12	MM	Standard
CF-198271-306	Socket	✓	✓	32	2x16	MM	Standard
CF-198271-307	Socket	✓	✓	48	4x12	MM	Standard
CF-198272-000	Pin	✓	✓	None Included			
CF-198272-002	Pin	✓	✓	8	1x8	SM	Elite
CF-198272-003	Pin	✓	✓	12	1x12	SM	Elite
CF-198272-004	Pin	✓	✓	24	2x12	SM	Elite
CF-198272-101	Pin	✓	✓	4	1x4	SM	Standard
CF-198272-102	Pin	✓	✓	8	1x8	SM	Standard
CF-198272-103	Pin	✓	✓	12	1x12	SM	Standard
CF-198272-104	Pin	✓	✓	24	2x12	SM	Standard
CF-198272-202	Pin	✓	✓	12	1x12	MM	Elite
CF-198272-203	Pin	✓	✓	16	1x16	MM	Elite
CF-198272-204	Pin	✓	✓	16	2x8	MM	Elite
CF-198272-205	Pin	✓	✓	24	2x12	MM	Elite
CF-198272-206	Pin	✓	✓	32	2x16	MM	Elite
CF-198272-301	Pin	✓	✓	4	1x4	MM	Standard
CF-198272-302	Pin	✓	✓	8	1x8	MM	Standard
CF-198272-303	Pin	✓	✓	12	1x12	MM	Standard
CF-198272-304	Pin	✓	✓	16	1x16	MM	Standard
CF-198272-305	Pin	✓	✓	24	2x12	MM	Standard
CF-198272-306	Pin	✓	✓	32	2x16	MM	Standard
CF-198272-307	Pin	✓	✓	48	4x12	MM	Standard

RUGGED PARALLEL TRANSCEIVERS:

Need a transceiver? Check out Amphenol's 12-channel 25Gbps LEAP or 4-channel 50Gbps PAM-4 QEPT!
Rugged, small, fast, power efficient, and high density! Contact Amphenol Sales for more information.



LEAP

Data rates up to *25Gbps* per channel at distances up to 100m
300Gbps total throughput requires only *1in²* of board and *5.4W*
Removable MT interface with off-the-shelf components
Efficient design for thermal dissipation off the top of the part
Built in error checker and PRBS generator for link verification
MIL-STD environments including -40°C to 85°C operation




QEPT

Data rates up to *25Gbps NRZ* or *50Gbps PAM-4* per channel
Enables efficient PCB routing with a mezzanine type board connector
Two-wire control and diagnostic interface for real time status monitoring
Programmable input equalization and output amplitude and emphasis
MIL-STD environments including -40°C to 85°C operation



MECHANICAL SPECIFICATIONS:

WALL MOUNT RECEPTACLE – TYPE TV00

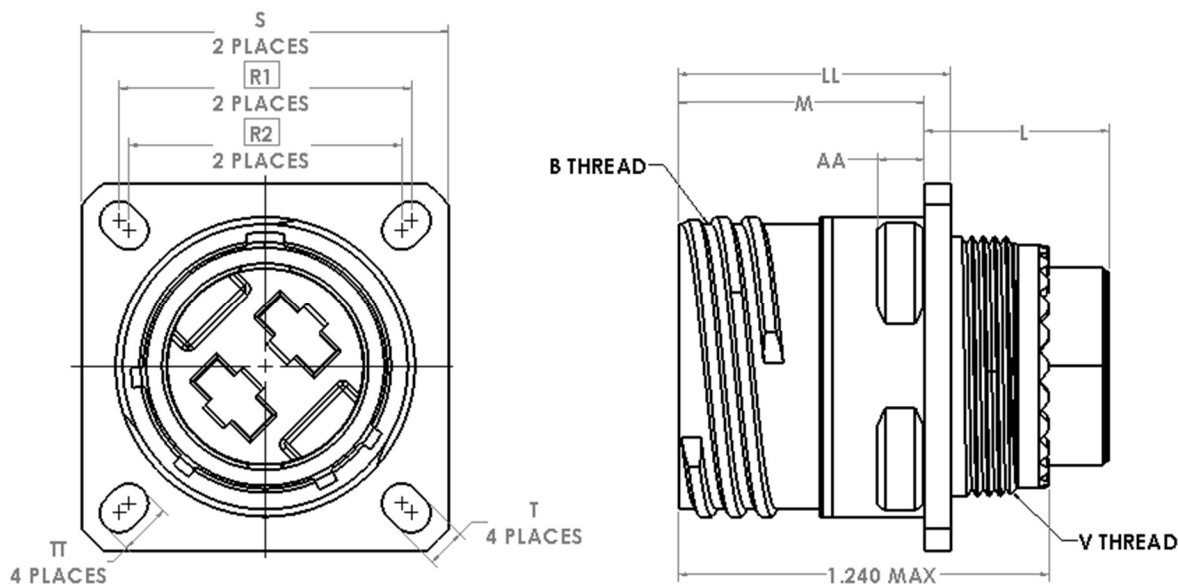


Shell Size	B Thread Class 2A 0.1P-0.3L- TS (Plated)	L Max.	M +.000 -.005	R1	R2	S Max.	T ±.008	AA Max. Panel Thickness	LL +.006 -.000	TT ±.008	V Thread Metric
11	.7500	1.039	.820	.812	.719	1.043	.128	.234	.905	.194	M15X1-6g
13	.8750	1.039	.820	.906	.812	1.137	.128	.234	.905	.194	M18X1-6g
17	1.1875	1.039	.820	1.062	.969	1.323	.128	.234	.905	.194	M25X1-6g
19	1.2500	1.039	.820	1.156	1.062	1.449	.128	.234	.905	.194	M28X1-6g
21	1.3750	1.069	.790	1.250	1.156	1.575	.128	.204	.905	.194	M31X1-6g
23	1.5000	1.069	.790	1.375	1.250	1.701	.154	.204	.905	.242	M34X1-6g
25	1.6250	1.069	.790	1.500	1.375	1.823	.154	.204	.905	.242	M37X1-6g

All dimensions for reference only (inches)

FOR ADDITIONAL INFORMATION, SEE MIL-DTL-38999/20 SPECIFICATION

STRAIGHT PLUG – TYPE TV06

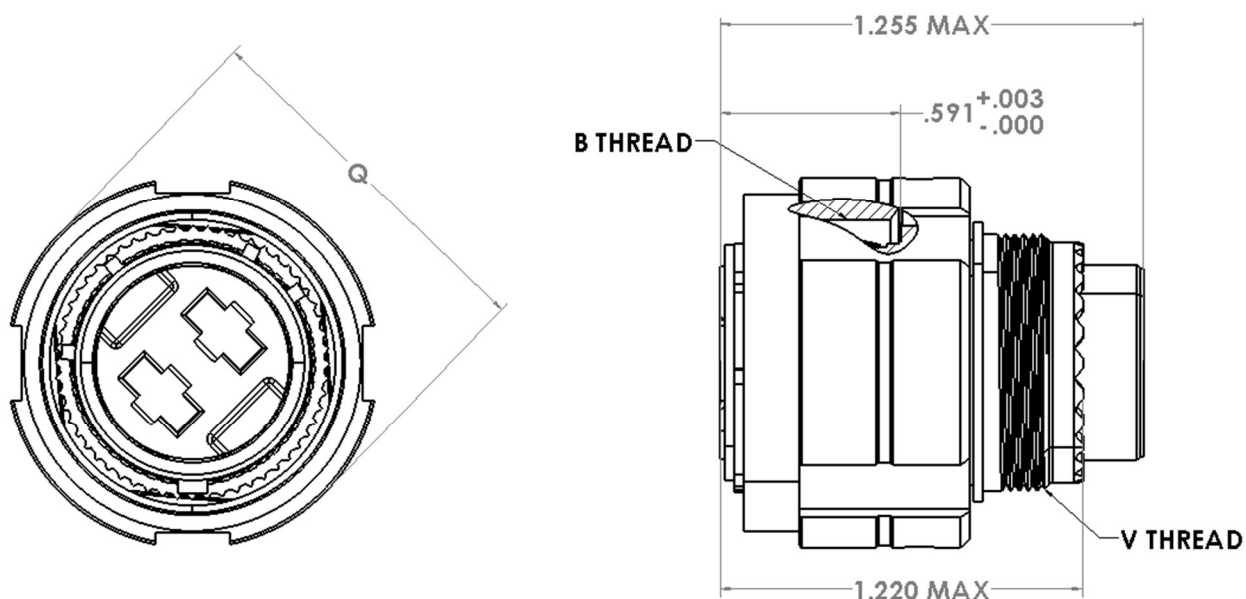


Shell Size	B Thread .01P-0.3L-TS-2B (Plated)	Q Dia. Max.	V Thread Metric
11	.7500	.984	M15X1-6g
13	.8750	1.157	M18X1-6g
17	1.1875	1.406	M25X1-6g
19	1.2500	1.516	M28X1-6g
21	1.3750	1.642	M31X1-6g
23	1.5000	1.768	M34X1-6g
25	1.6250	1.890	M37X1-6g

All dimensions for reference only (inches)

FOR ADDITIONAL INFORMATION, SEE MIL-DTL-38999/26 SPECIFICATION

JAM NUT RECEPTACLE – TYPE TV07

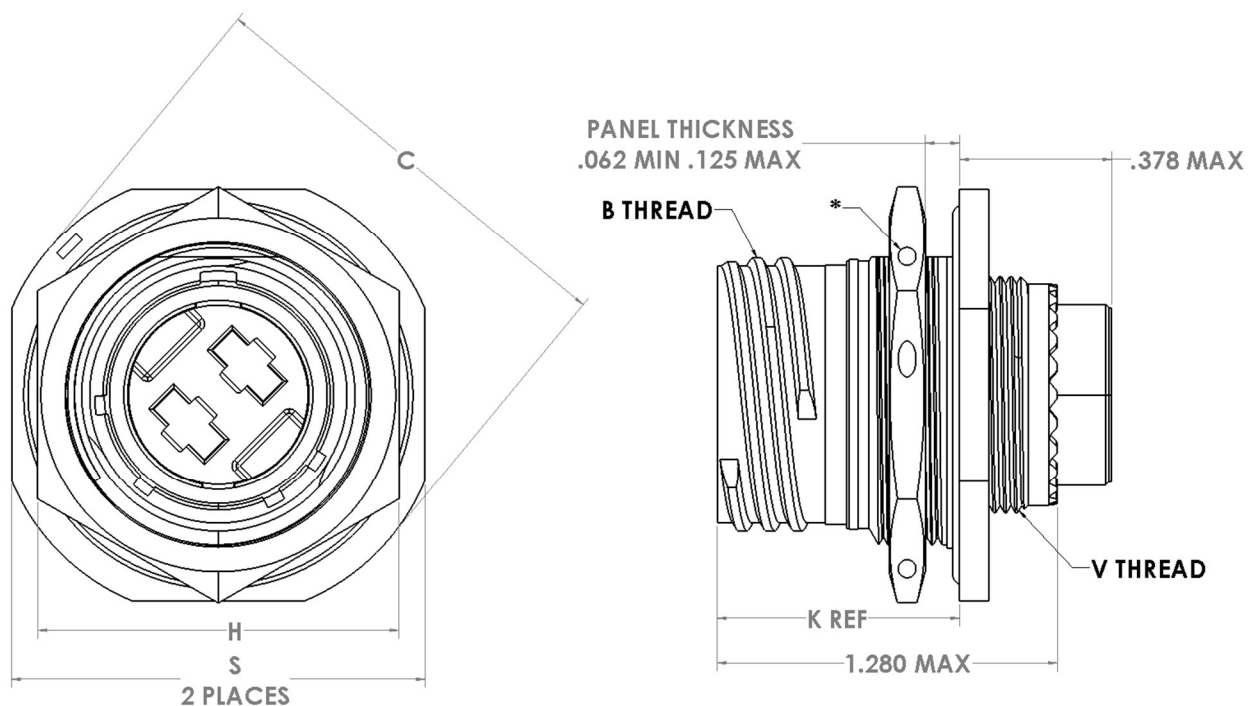

*0.059 dia. min., 3 lockwire holes, formed lockwire hole design (6 holes) is optional

Shell Size	B Thread Class 2A 0.1P-0.3L- TS (Plated)	C Max.	H Hex	$\begin{smallmatrix} +.017 \\ -.016 \end{smallmatrix}$	$S \pm .010$	K Ref.	V Thread Metric
11	.7500	1.199	.820		1.250	.871	M15X1-6g
13	.8750	1.386	.820		1.375	.878	M18X1-6g
17	1.1875	1.636	.820		1.625	.878	M25X1-6g
19	1.2500	1.761	.820		1.812	.878	M28X1-6g
21	1.3750	1.949	.790		1.938	.878	M31X1-6g
23	1.5000	2.073	.790		2.062	.878	M34X1-6g
25	1.6250	2.199	.790		2.188	.878	M37X1-6g

All dimensions for reference only(inches)

FOR ADDITIONAL INFORMATION SEE MIL-DTL-38999/24 SPECIFICATION

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors. AMPHENOL is a registered trademark of Amphenol Corporation.

©2025 Amphenol Corporation REV FEB25



40-60 Delaware Avenue
Sidney, NY 13838
amphenol-aerospace.com | amphenolmao.com